

Single Pass Efficiency Digital Inkjet Color Printer

SwiftColor Card and Envelope
SCC-4000D



Features

- High Quality. 1200dpi
- Single-pass printhead architecture
- Desktop and Compact

Versatile Applications


Business cards, invitations, postcards, plastic cards, customized envelopes and event passes.



Product Specifications

SCC-4000D		
Print Technology		Ink jet (single pass printing)
Type of the Ink		Dye based ink
Print Color		4 color (Bk, C, M, Y)
Dimensions (W × D × H)		24.3 (W) x 16.1 (H) x 18.2 (D) inches
		618(W) x 410 (H) x 463 (D) mm
Weight		Approx. 55.12 lbs. (25kg) Net
Resolution		1200x1200dpi
Print Head	Print Heads	4
Print Width		4.24 inches (107.8mm)
Print Speed (Copy Mode)		100 sheets/min. Business card (2.2 x 3.6 inches)(55 x 91mm)
		45 sheets/min. Postcard (3.9 x 5.8 inches)(100 x 148mm)
		28 sheets/ min. Envelope (9.3 x 4.7 inches)(235×120mm)
		50 sheets/min. Plastic card (3.5 x 5.5 inches)(89 x 140mm)
Max. Print Area	Width	4.24 inches (107.8mm)
	Length	11.69 inches(297.0mm)
Margins	Top/Bottom	0.08 inches (2mm)
	Left/Right	0.08 inches (2mm)
Type of Media		Exclusive business card, envelope, postcard, plastic card
Paper Transport Size	Width	3.35-4.7 inches (85-120mm)
	Length	1.9-11.81 inches (49-300mm)
	Thickness	200-760µm
Deck Capacity		Business card: 500 sheets thickness = .01 inches (0.245mm)
		Postcard: 500 sheets thickness = .01 inches (0.245mm)
		Envelope: 100 sheets (Flap side downward)
		Plastic card: 100 sheets thickness = 30mil (0.76mm)
Interface	Data Transmission	USB2.0 Hi-speed function Giga Bit Ethernet
OS		WinXP, Vista, Win7 (32/64bit)
Power Supply		100-240V, 50-60Hz
Max. Power Consumption		250W
Operating Environment (Temperature/Humidity)		59°F10% -86°F80% (15°C 10% - 30°C 80%)
Ink Cartridges	Color	Bk/C/M/Y
	Capacity	100ml for each color

*Specification subject to change without notice.

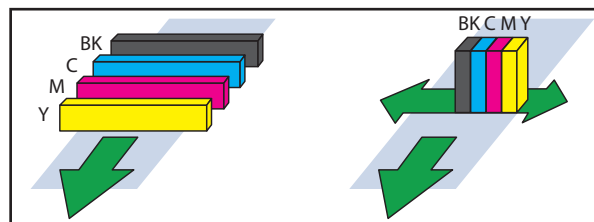

Single-pass printing
(SCC-4000D)

Serial printing